

Collegamenti e accessori




Attacco a perni sfilabili  
VC 10



Adattatore attacco rapido  
(non incluso)  
VC 04




Snodo orientabile  
(giunto di Hirth)  
VC 14



0,7 - 5 ton Ø 2 - 3 cm

MISURE

	A (mm.)	B (mm.)	C (mm.)	H (mm.)
BT 50	1200	1270	300	50
BT 51	1200	1270	300	50
BT 52	1200	1270	300	50
BT 53	1200	1270	300	50
BT 54	1600	1670	300	50
BT 55	1600	1670	300	50
BT 56	1600	1670	300	50
BT 57	1800	1870	300	50
BT 58	1800	1870	300	50
BT 59	1800	1870	300	50

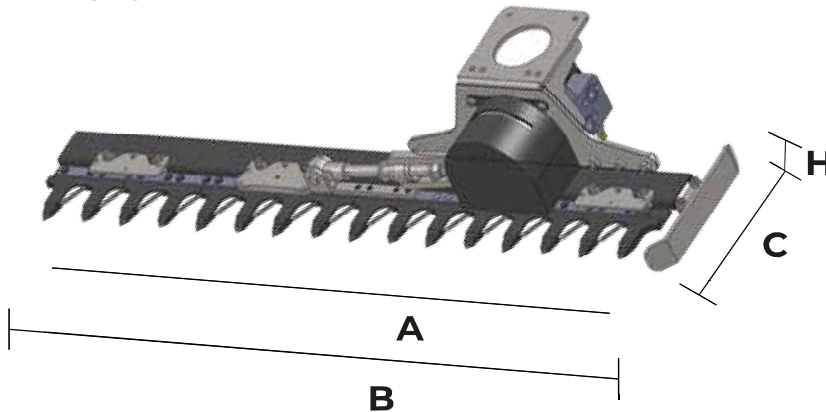


Pressione max - 180 bar



	BT 50	BT 51	BT 52	BT 53	BT 54	BT 55	Bt 56	BT 57	BT 58	BT 59
 lit/min	19	26	40	50	26	40	50	26	40	50
 Kg.	42	42	42	42	55	55	55	64	64	64
 ton	0,7 - 1,2	1,3 - 2,5	2,6 - 4	4 - 5	2 - 2,5	2,6 - 4	4 - 5	2 - 2,5	2,6 - 4	4 - 5

**Tagliarami**


Pressione max: 140 bar  
Portata olio max: 40lt/min.



2,7 - 5 ton



Ø 5 cm



110

